



Technical Specification

MEF 14

Abstract Test Suite for Traffic Management Phase 1

November, 2005

Disclaimer

The information in this publication is freely available for reproduction and use by any recipient and is believed to be accurate as of its publication date. Such information is subject to change without notice and the Metro Ethernet Forum (MEF) is not responsible for any errors. The MEF does not assume responsibility to update or correct any information in this publication. No representation or warranty, expressed or implied, is made by the MEF concerning the completeness, accuracy, or applicability of any information contained herein and no liability of any kind shall be assumed by the MEF as a result of reliance upon such information.

The information contained herein is intended to be used without modification by the recipient or user of this document. The MEF is not responsible or liable for any modifications to this document made by any other party.

The receipt or any use of this document or its contents does not in any way create, by implication or otherwise:

- (a) any express or implied license or right to or under any patent, copyright, trademark or trade secret rights held or claimed by any MEF member company which are or may be associated with the ideas, techniques, concepts or expressions contained herein; nor
- (b) any warranty or representation that any MEF member companies will announce any product(s) and/or service(s) related thereto, or if such announcements are made, that such announced product(s) and/or service(s) embody any or all of the ideas, technologies, or concepts contained herein; nor
- (c) any form of relationship between any MEF member companies and the recipient or user of this document.

Implementation or use of specific Metro Ethernet standards or recommendations and MEF specifications will be voluntary, and no company shall be obliged to implement them by virtue of participation in the Metro Ethernet Forum. The MEF is a non-profit international organization accelerating industry cooperation on Metro Ethernet technology. The MEF does not, expressly or otherwise, endorse or promote any specific products or services.

© The Metro Ethernet Forum 2005. All Rights Reserved.

Table of Contents

1.	Abstract	1
2.	Terminology	1
3.	Scope	4
4.	Compliance Levels	5
5.	Introduction	5
6.	Test Configuration	7
7.	Template for Abstract Test Cases for Traffic Management	9
8.	Abstract Test Cases for EVC Related Performance Service Attributes	10
9.	Abstract Test Cases for Bandwidth Profiles Service Attributes	14
10.	References	22

List of Figures

Figure 1; Relationship between different MEF Service Group documents and the Ethernet Services Test Definition Documents	5
Figure 2: Relationship between Ethernet Service Documents and Abstract Test Cases for Ethernet Services at the UNI	6
Figure 3: Test Configuration for Ethernet Services at the UNI	7
Figure 4: CE-VLAN ID/EVC Maps for the ingress and egress UNIs	8
Figure 5: Bandwidth Profile Service Attributes.....	8
Figure 6: EVC Performance Service Attributes.....	8

List of Test Cases

Test Case 1: Frame Delay Service Performance.....	11
Test Case 2: Frame Delay Variation Service Performance.....	12
Test Case 3: Frame Loss Ratio Service Performance	13
Test Case 4: Bandwidth Profile Rate Enforcement when CIR > 0 and EIR = 0.....	15
Test Case 5: Bandwidth Profile Rate Enforcement when CIR = 0 and EIR > 0.....	16
Test Case 6: Bandwidth Profile Rate Enforcement when CIR > 0 and EIR > 0.....	17
Test Case 7: Bandwidth Profile per Ingress UNI.....	18
Test Case 8: Bandwidth Profile per EVC	19
Test Case 9: Bandwidth Profile per Class of Service	20
Test Case 10: Multiple Bandwidth Profiles at the UNI	21

1. Abstract

This document defines the requirements and corresponding test procedures for Service Performance and Bandwidth Profile Service Attributes that may be specified as part of a Service Level Specification (SLS) for an Ethernet Service. Requirements are derived from Metro Ethernet Forum Technical Committee documents.

2. Terminology

All to One Bundling	A UNI attribute in which all CE-VLAN IDs are associated with a single EVC.
Bandwidth Profile	A characterization of ingress Service Frame arrival times and lengths at a reference point and a specification of the disposition of each Service Frame based on its level of compliance with the Bandwidth Profile. In this document the reference point is the UNI.
Broadcast Service Frame	A Service Frame that has the broadcast destination MAC address.
Bundling	A UNI attribute in which more than one CE-VLAN ID can be associated with an EVC.
CBS	Committed Burst Size
CE	Customer Edge
CE-VLAN CoS	Customer Edge VLAN CoS
CE-VLAN ID	Customer Edge VLAN ID
CE-VLAN ID Preservation	An EVC attribute in which the CE-VLAN ID of an egress Service Frame is identical in value to the CE-VLAN ID of the corresponding ingress Service Frame.
CE-VLAN ID/EVC Map	An association of CE-VLAN IDs with EVCs at a UNI.
CE-VLAN Tag	Customer Edge VLAN Tag
CF	Coupling Flag
CIR	Committed Information Rate
Class of Service	A set of Service Frames that have a commitment from the Service Provider to receive a particular level of performance.
Class of Service Identifier	Information derivable from a) the EVC to which the Service Frame is mapped or b) the combination of the EVC to which the Service Frame is mapped and a set of one or more CE-VLAN CoS values.
CM	Color Mode

Color Mode	CM is a Bandwidth Profile parameter. The Color Mode parameter indicates whether the color-aware or color-blind property is employed by the Bandwidth Profile. It takes a value of "color-blind" or "color-aware" only.
Color-aware	A Bandwidth Profile property where a pre-determined level of Bandwidth Profile compliance for each Service Frame is taken into account when determining the level of compliance for each Service Frame.
Color-blind	A Bandwidth Profile property where a pre-determined level of Bandwidth Profile compliance for each Service Frame, if present, is ignored when determining the level of compliance for each Service Frame.
Committed Burst Size	CBS is a Bandwidth Profile parameter. It limits the maximum number of bytes available for a burst of ingress Service Frames sent at the UNI speed to remain CIR-conformant.
Committed Rate	Information Rate
	CIR is a Bandwidth Profile parameter. It defines the average rate in bits/s of ingress Service Frames up to which the network delivers Service Frames and meets the performance objectives defined by the CoS Service Attribute.
Coupling Flag	CF is a Bandwidth Profile parameter. The Coupling Flag allows the choice between two modes of operations of the rate enforcement algorithm. It takes a value of 0 or 1 only.
Customer Edge	Equipment on the Subscriber side of the UNI.
Customer Edge VLAN CoS	The user priority bits in the IEEE 802.1Q Tag in a Service Frame that is either tagged or priority tagged.
Customer Edge VLAN ID	The identifier derivable from the content of a Service Frame that allows the Service Frame to be associated with an EVC at the UNI.
Customer Edge VLAN Tag	The IEEE 802.1Q Tag in a tagged Service Frame.
EBS	Excess Burst Size
Egress Service Frame	A Service Frame sent from the Service Provider network to the CE.
EIR	Excess Information Rate
E-LAN Service	Ethernet LAN Service
E-Line Service	Ethernet Line Service
Ethernet LAN Service	An Ethernet Service Type distinguished by its use of a Multipoint-to-Multipoint EVC.
Ethernet Line Service	An Ethernet Service Type distinguished by its use of a Point-to-Point EVC.
Ethernet Virtual Connection	An association of two or more UNIs that limits the exchange of Service Frames to UNIs in the Ethernet Virtual Connection.

EVC	Ethernet Virtual Connection
Excess Burst Size	EBS is a Bandwidth Profile parameter. It limits the maximum number of bytes available for a burst of ingress Service Frames sent at the UNI speed to remain EIR-conformant.
Excess Information Rate	EIR is a Bandwidth Profile parameter. It defines the average rate in bits/s of ingress Service Frames up to which the network may deliver Service Frames without any performance objectives.
FD	Frame Delay
FDV	Frame Delay Variation
FLR	Frame Loss Ratio
Frame	Short for Ethernet frame.
Frame Delay	The time required to transmit a Service Frame from source to destination across the metro Ethernet network.
Frame Delay Performance	A measure of the delays experienced by different Service Frames belonging to the same CoS instance.
Frame Delay Variation	The difference in delay of two Service Frames.
Frame Delay Variation Performance	A measure of the variation in the delays experienced by different Service Frames belonging to the same CoS instance.
Frame Loss Ratio Performance	Frame Loss Ratio is a measure of the number of lost frames inside the MEN. Frame Loss Ratio is expressed as a percentage.
Ingress Service Frame	A Service Frame sent from the CE into the Service Provider network.
Layer 2 Control Protocol Service Frame	A Service Frame that is used for Layer 2 control, e.g., Spanning Tree Protocol.
Layer 2 Control Protocol Tunneling	The process by which a Layer 2 Control Protocol Service Frame is passed through the Service Provider network without being processed and is delivered unchanged to the proper UNI(s).
Multicast Service Frame	A Service Frame that has a multicast destination MAC address.
Multipoint-to-Multipoint EVC	An EVC with two or more UNIs. A Multipoint-to-Multipoint EVC with two UNIs is different from a Point-to-Point EVC because one or more additional UNIs can be added to it.
Point-to-Point EVC	An EVC with exactly 2 UNIs.
Service Frame	An Ethernet frame transmitted across the UNI toward the Service Provider or an Ethernet frame transmitted across the UNI toward the Subscriber.
Service Level Agreement	The contract between the Subscriber and Service Provider specifying the agreed to service level commitments and related business agreements.

Service Level Specification	The technical specification of the service level being offered by the Service Provider to the Subscriber.
Service Multiplexing	A UNI service attribute in which the UNI can be in more than one EVC instance.
Service Provider	The organization providing Ethernet Service(s).
SLA	Service Level Agreement
SLS	Service Level Specification
Subscriber	The organization purchasing and/or using Ethernet Services.
UNI	User Network Interface
Unicast Service Frame	A Service Frame that has a unicast destination MAC address.
User Network Interface	The physical demarcation point between the responsibility of the Service Provider and the responsibility of the Subscriber.

3. Scope

This document defines the requirements and corresponding test procedures for Service Performance and Bandwidth Profile Service Attributes that may be specified as part of a Service Level Specification (SLS) for an Ethernet Service. As with MEF 9 Abstract Test Suite for Ethernet Services at the UNI [3], the tests in this specification are defined from the point of view of the Subscriber's equipment that is used to access the services.

The requirements defined in this document are based on Sections 6.7 and 7.10 of MEF 10 Ethernet Services Attributes Phase 1 [1]. Section 6.7 of MEF 10 [1] defines three EVC Related Performance Service Attributes: Frame Delay Performance, Frame Delay Variation Performance, and Frame Loss Ratio Performance. Section 7.10 of MEF 10 defines Bandwidth Profile Service Attributes of an Ethernet Service at the UNI. Bandwidth Profiles Service Attributes are defined per Ingress UNI, per EVC, and per Class of Service. Six parameters are applied to Bandwidth Profiles: Committed Information Rate (CIR), Committed Burst Size (CBS), Excess Information Rate (EIR), Excess Burst Size (EBS), Coupling Flag (CF) and Color Mode (CM). In the absence of a standard way to color Service Frames, tests are not defined in relation to CF and CM parameters that may be applied to a Bandwidth Profile. Such tests may be added in the future when Service Frame Coloring is further specified.

When combined with MEF 9 [3], this specification covers all of the EVC and UNI related Service Attributes specified in MEF 10 [1]. Together they provide a comprehensive set of Test Cases to determine the readiness of a Metro Ethernet Network (MEN) to deliver various Ethernet Services, such as Ethernet Line (E-Line) and Ethernet LAN (E-LAN) services when Service Performance and Bandwidth Profile Service Attributes are specified.

Implementation specifications are outside the scope of this document. This document may be updated in the future to reflect new work in the MEF Technical Committee.

4. Compliance Levels

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC 2119 [5]. All key words must be in upper case, bold text.

5. Introduction

This document completes MEF 9 [3] by adding requirements and test procedures for Service Performance and Bandwidth Profile Service Attributes defined in MEF 10 [1]. As with MEF 9, vendors can refer to the requirements and test procedures defined in this specification in the development and commercial cycles of their products, carriers can use them to ensure that the networks they deploy will have the ability to deliver Ethernet Services that support Service Level Specifications defined by the Technical Committee of the Metro Ethernet Forum and subscribers can attach to the MEN knowing that the Ethernet Services they access satisfy criteria based on accepted requirements and test procedures.

The definition of the requirements a MEN must satisfy to deliver Services to which Traffic and Performance parameters are applied is tightly based on the MEF 10 [1]. The Ethernet Service Definition Framework was created by the Metro Ethernet Forum (MEF) to provide the service attributes and parameters to create an Ethernet service. The relationship between the Ethernet Services Test Definition documents and the two MEF services documents is illustrated in Figure 1.

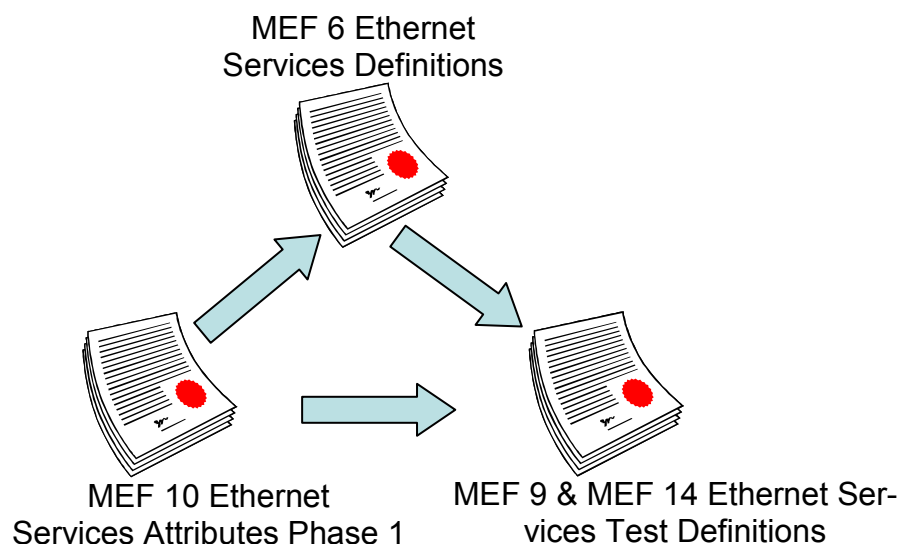


Figure 1: Relationship between different MEF Services Group documents and the Ethernet Services Test Definition Documents

The fundamental service constructs defined in MEF 10 [1] are Ethernet Service Types. These have two types of Service Attributes associated with them, those associated with the UNI, and those associated with the EVC. This specification defines requirements and test procedures based on the Performance Service Attributes which are associated with the EVC and on the Bandwidth Profile Service Attributes which are associated with the UNI. MEF 10 [1] also defines the type of parameter values associated with each of these Service Attributes.

A conceptual schematic of the relationship between the MEF Technical Committee Ethernet Services documents and the derived MEN requirements and correspondingly defined test definitions is represented in Figure 2.

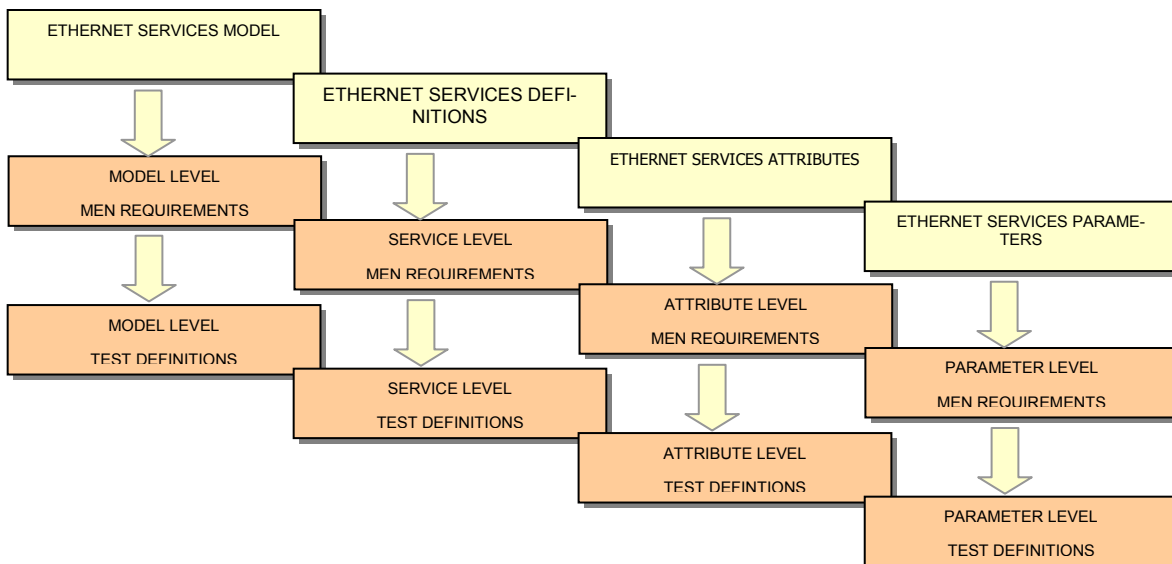


Figure 2: Relationship between Ethernet Service Documents and Abstract Test Cases for Ethernet Services at the UNI

6. Test Configuration

Although some tests may require very specific test configurations, most tests defined in this document are to be executed by attaching the Ethernet interface or interfaces of a Tester to the Ethernet interface or interfaces at the UNI. Since the UNI is the physical demarcation point which delimits the responsibilities of the Subscriber and the Service Provider, the Tester attached in this way sees a MEN from the point of view of the Subscriber's equipment and can test a MEN's ability to offer Ethernet Services to the Subscriber. We schematically represent the attachment of the Tester to the MEN in Figure 3

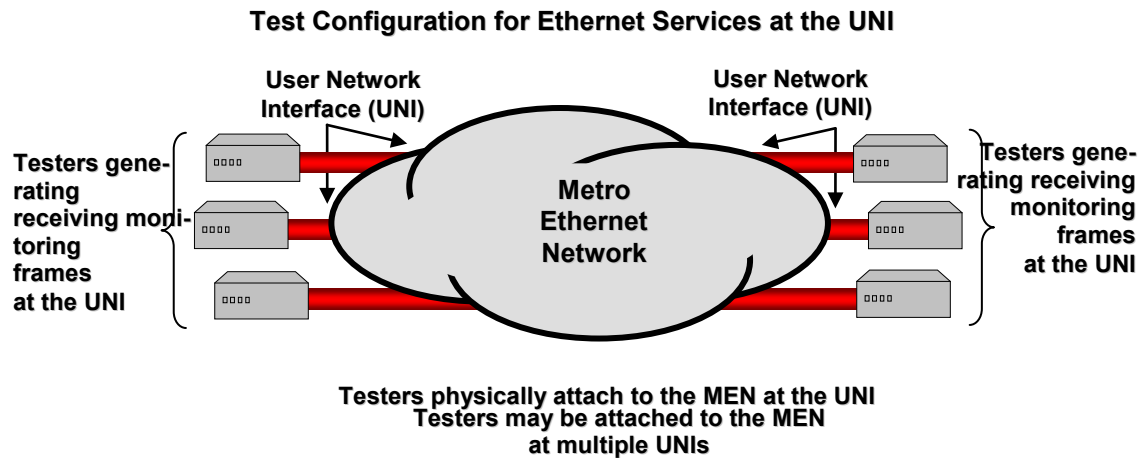


Figure 3: Test Configuration for Ethernet Services at the UNI

The Test Configuration for each Test Case describes the number of EVCs associating the number of UNIs in the Test Case and the number of CE-VLAN IDs mapped to the EVCs. Testers are attached to all UNIs in the configured EVCs in all Test Cases. CE-VLAN ID/EVC Maps are given for each Test Case.

In this document CE-VLAN ID/EVC Maps for the ingress and egress UNIs as in Figure 4, specific Bandwidth Profile Service Attributes as in Figure 5 and EVC Performance Service Attributes as in Figure 6 are suggested for each Test Case.

INGRESS UNI 'A'		EGRESS UNI 'B'	
CE-VLAN ID	EVC	CE-VLAN ID	EVC
10	EVC ₁	10	EVC ₁
Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1			

Figure 4: CE-VLAN ID/EVC Maps for the ingress and egress UNIs

Per Ingress UNI				
UNI	Bandwidth Profile Parameters			
UNI _A	CIR _A	CBS _A	EIR _A	EBS _A
Note 1 : (0 < CIR _A ≤ UNI Speed), (CBS _A ≥ maximum Service Frame size)				

Figure 5: Bandwidth Profile Service Attributes

CoS Identifier	EVC Performance Service Attributes	Performance Objectives
1	Frame Delay (FD) Performance Frame Delay Variation (FDV) Performance Frame Loss Ratio (FLR) Performance	FD ₁ FDV ₁ FLR ₁

Figure 6: EVC Performance Service Attributes

7. Template for Abstract Test Cases for Traffic Management

We adopt the following template for the definition of Abstract Test Cases for Management:

ABSTRACT TEST SUITE FOR TRAFFIC MANAGEMENT: PHASE 1																
Test Name	Name derived from reference document															
Test Definition ID	A punctuated alphanumeric string assigned to each defined requirement and test procedure couple using the following convention: 'one to three letter abbreviated source document name'. 'section number' - 'paragraph number in the section from which requirement is derived'. This number always figures as the last number of an ID. Ethernet Services Model=M; Ethernet Services Definitions=S. Example: M.6.1-4															
Reference Document	Reference document and section (and paragraph when useful for clarity)															
Test Type	Functional, Conformance, Interoperability or Performance															
Test Status	Mandatory, optional															
Requirement Description	Brief description of the service requirement that the MEN MUST or SHOULD satisfy															
Test Object	Succinct description of test purpose															
Test Configuration	Succinct description of test bed configuration															
VLAN-ID/EVC Map	<p>A sample VLAN ID/EVC Map is suggested. Variables augment it.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">INGRESS UNI 'A'</th> <th colspan="2">EGRESS UNI 'B'</th> </tr> <tr> <th>CE-VLAN ID</th> <th>EVC</th> <th>CE-VLAN ID</th> <th>EVC</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> </tr> </tbody> </table> <p>Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1</p>	INGRESS UNI 'A'		EGRESS UNI 'B'		CE-VLAN ID	EVC	CE-VLAN ID	EVC	10	EVC ₁	10	EVC ₁			
INGRESS UNI 'A'		EGRESS UNI 'B'														
CE-VLAN ID	EVC	CE-VLAN ID	EVC													
10	EVC ₁	10	EVC ₁													
Bandwidth Profile	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="5">Per Ingress UNI</th> </tr> <tr> <th>UNI</th> <th colspan="4">Bandwidth Profile Parameters</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">UNI_A</td> <td style="text-align: center;">CIR_A</td> <td style="text-align: center;">CBS_A</td> <td style="text-align: center;">EIR_A</td> <td style="text-align: center;">EBS_A</td> </tr> </tbody> </table> <p>Note 1 : (0 < CIR_A ≤ UNI Speed), (CBS_A ≥ maximum Service Frame size)</p>	Per Ingress UNI					UNI	Bandwidth Profile Parameters				UNI _A	CIR _A	CBS _A	EIR _A	EBS _A
Per Ingress UNI																
UNI	Bandwidth Profile Parameters															
UNI _A	CIR _A	CBS _A	EIR _A	EBS _A												
Service Performance	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>CoS Identifier</th> <th>EVC Performance Service Attributes</th> <th>Performance Objectives</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td> Frame Delay (FD) Performance Frame Delay Variation (FDV) Performance Frame Loss Ratio (FLR) Performance </td> <td style="text-align: center;"> FD₁ FDV₁ FLR₁ </td> </tr> </tbody> </table>	CoS Identifier	EVC Performance Service Attributes	Performance Objectives	1	Frame Delay (FD) Performance Frame Delay Variation (FDV) Performance Frame Loss Ratio (FLR) Performance	FD ₁ FDV ₁ FLR ₁									
CoS Identifier	EVC Performance Service Attributes	Performance Objectives														
1	Frame Delay (FD) Performance Frame Delay Variation (FDV) Performance Frame Loss Ratio (FLR) Performance	FD ₁ FDV ₁ FLR ₁														
Test Procedure	Succinct description of the test procedure. CE-VLAN ID/EVC Maps are provided for all tests.															
Units	Units can be time units, rates and counts in integers such as milliseconds, frames per second and numbers of valid frames. For the most part units used are defined in RFCs 2285, 2544, 2889.															
Variables	Variables such as number of UNIs, EVCs and CE-VLAN IDs and frame formats and lengths MUST be described.															
Results	Description of the textual, numerical and/or graphical format in which to display test results. Results can be Pass or Fail.															
Remarks	Description of any particular observations that might effect the test result															

8. Abstract Test Cases for EVC Related Performance Service Attributes

In this section we assume familiarity with the MEF 10 Ethernet Services Attributes Phase 1 [1] and, in particular, its section 6.7 which defines EVC Related Performance Service Attributes. Abstract Test Cases based on the EVC Related Performance Service Attributes described in the MEF 10 [1] are defined. There are three Test Cases defined in this section.

Test Case 1: Frame Delay Service Performance

Test Case 2: Frame Delay Variation Service Performance

Test Case 3: Frame Loss Ratio Service Performance

Test Case 1: Frame Delay Service Performance

ABSTRACT TEST SUITE FOR TRAFFIC MANAGEMENT: PHASE 1																
Test Name	Frame Delay Service Performance															
Test Definition ID	M.6.7.1															
Reference Document	MEF 10 [Ethernet Services Attributes Phase 1]															
Test Type	Conformance															
Test Status	Mandatory															
Requirement Description	For all Service Frames declared Green and associated with a particular Class of Service Identifier on a Point-to-Point EVC that arrive at the UNI during a time interval T , Frame Delay Performance MUST be less than or equal to the Frame Delay Performance Objective															
Test Object	Verify that for all Service Frames declared Green and associated with a particular Class of Service Identifier on a Point-to-Point EVC that arrive at the UNI during a time interval T , Frame Delay Performance is less than or equal to the Frame Delay Performance Objective															
Test Configuration	At least one EVC associating at least two UNIs is configured and at least one Bandwidth Profile with CIR > 0 is associated with at least one of the UNIs. Testers are attached to all UNIs in the configured EVCs															
VLAN-ID/EVC Map	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">INGRESS UNI 'A'</th> <th colspan="2">EGRESS UNI 'B'</th> </tr> <tr> <th>CE-VLAN ID</th> <th>EVC</th> <th>CE-VLAN ID</th> <th>EVC</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>EVC₁</td> <td>10</td> <td>EVC₁</td> </tr> </tbody> </table> <p>Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1.</p>	INGRESS UNI 'A'		EGRESS UNI 'B'		CE-VLAN ID	EVC	CE-VLAN ID	EVC	10	EVC ₁	10	EVC ₁			
INGRESS UNI 'A'		EGRESS UNI 'B'														
CE-VLAN ID	EVC	CE-VLAN ID	EVC													
10	EVC ₁	10	EVC ₁													
Bandwidth Profile	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="5">Per Ingress UNI</th> </tr> <tr> <th>UNI</th> <th colspan="4">Bandwidth Profile Parameters</th> </tr> </thead> <tbody> <tr> <td>UNI_A</td> <td>CIR_A</td> <td>CBS_A</td> <td>EIR_A</td> <td>EBS_A</td> </tr> </tbody> </table> <p>Note 1 : ($0 < CIR_A \leq \text{UNI Speed}$), ($CBS_A \geq \text{maximum Service Frame size}$)</p>	Per Ingress UNI					UNI	Bandwidth Profile Parameters				UNI _A	CIR _A	CBS _A	EIR _A	EBS _A
Per Ingress UNI																
UNI	Bandwidth Profile Parameters															
UNI _A	CIR _A	CBS _A	EIR _A	EBS _A												
Service Performance	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>CoS Identifier</th> <th>EVC Performance Service Attributes</th> <th>Performance Objectives</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Frame Delay (FD) Performance</td> <td>FD₁</td> </tr> </tbody> </table>	CoS Identifier	EVC Performance Service Attributes	Performance Objectives	1	Frame Delay (FD) Performance	FD ₁									
CoS Identifier	EVC Performance Service Attributes	Performance Objectives														
1	Frame Delay (FD) Performance	FD ₁														
Test Procedure	Tester offers Service Frames at the ingress UNI into the configured EVCs and measures Frame Delay as the time elapsed from the reception of the first bit of the ingress Service Frame declared Green until the transmission of the last bit of the Service Frame at the egress UNI. Frame Delay Performance is then calculated for a time interval T , as the P-Percentile of the Frame Delay for all Service Frames successfully delivered between the UNI pairs. Service Frames may be offered at an average rate up to CIR _A															
Units	Time units															
Variables	Bandwidth Profile Parameters CIR _A , CBS _A , EIR _A , EBS _A , UNIs interface Speed, number of EVCs per UNI, number and values of CE-VLAN IDs, number and values of CoS ID, time interval T , Performance Objective FD ₁															
Results	Pass or fail															
Remarks																

Test Case 2: Frame Delay Variation Service Performance

ABSTRACT TEST SUITE FOR TRAFFIC MANAGEMENT: PHASE 1													
Test Name	Frame Delay Variation Service Performance												
Test Definition ID	M.6.7.3												
Reference Document	MEF 10 [Ethernet Services Attributes Phase 1]												
Test Type	Conformance												
Test Status	Mandatory												
Requirement Description	For all Service Frames declared Green and associated with a particular Class of Service Identifier on a Point-to-Point EVC that arrive at the UNI during a time interval T , Frame Delay Variation Performance MUST be less than or equal to the Frame Delay Variation Performance Objective												
Test Object	Verify that for all Service Frames declared Green and associated with a particular Class of Service Identifier on a Point-to-Point EVC that arrive at the UNI during a time interval T , Frame Delay Variation Performance is less than or equal to the Frame Delay Variation Performance Objective												
Test Configuration	At least one EVC associating at least two UNIs is configured and at least one Bandwidth Profile with $CIR > 0$ is associated with at least one of the UNIs. Testers are attached to all UNIs in the configured EVCs												
VLAN-ID/EVC Map	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">INGRESS UNI 'A'</th> <th colspan="2">EGRESS UNI 'B'</th> </tr> <tr> <th>CE-VLAN ID</th> <th>EVC</th> <th>CE-VLAN ID</th> <th>EVC</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> </tr> </tbody> </table> <p>Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1.</p>	INGRESS UNI 'A'		EGRESS UNI 'B'		CE-VLAN ID	EVC	CE-VLAN ID	EVC	10	EVC ₁	10	EVC ₁
INGRESS UNI 'A'		EGRESS UNI 'B'											
CE-VLAN ID	EVC	CE-VLAN ID	EVC										
10	EVC ₁	10	EVC ₁										
Bandwidth Profile	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="4">Per Ingress UNI</th> </tr> <tr> <th>UNI</th> <th colspan="3">Bandwidth Profile Parameters</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">UNI_A</td> <td style="text-align: center;">CIR_A</td> <td style="text-align: center;">CBS_A</td> <td style="text-align: center;">EIR_A EBS_A</td> </tr> </tbody> </table> <p>Note 1 : ($0 < CIR_A \leq$ UNI Speed), ($CBS_A \geq$ maximum Service Frame size)</p>	Per Ingress UNI				UNI	Bandwidth Profile Parameters			UNI _A	CIR _A	CBS _A	EIR _A EBS _A
Per Ingress UNI													
UNI	Bandwidth Profile Parameters												
UNI _A	CIR _A	CBS _A	EIR _A EBS _A										
Service Performance	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>CoS Identifier</th> <th>EVC Performance Service Attributes</th> <th>Performance Objectives</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">Frame Delay Variation (FDV) Performance</td> <td style="text-align: center;">FDV₁</td> </tr> </tbody> </table>	CoS Identifier	EVC Performance Service Attributes	Performance Objectives	1	Frame Delay Variation (FDV) Performance	FDV ₁						
CoS Identifier	EVC Performance Service Attributes	Performance Objectives											
1	Frame Delay Variation (FDV) Performance	FDV ₁											
Test Procedure	<p>Tester offers Service Frames at the ingress UNI into the configured EVCs and measures Frame Delay Variation as the variation in the Frame Delay between a pair of Green Service Frames. Frame Delay Variation Performance is then calculated for a time interval T, as the P-Percentile of the difference between the frame delays of a Service Frame pair that satisfies the following two characteristics:</p> <ol style="list-style-type: none"> The two Service Frames that comprise the pair arrive at the ingress UNI within the time interval T The two Service Frames that comprise the pair arrive at the ingress UNI exactly Δt time units apart <p>Service Frames may be offered at an average rate up to CIR_A</p>												
Units	Time units												
Variables	Bandwidth Profile Parameters CIR_A , CBS_A , EIR_A , EBS_A , UNIs interface Speed, number of EVCs per UNI, number and values of CE-VLAN IDs, number and values of CoS ID, time interval T , Performance Objective FDV_1												
Results	Pass or fail												
Remarks													

Test Case 3: Frame Loss Ratio Service Performance

ABSTRACT TEST SUITE FOR TRAFFIC MANAGEMENT: PHASE 1													
Test Name	Frame Loss Ratio Service Performance												
Test Definition ID	M.6.7.5												
Reference Document	MEF 10 [Ethernet Services Attributes Phase 1]												
Test Type	Conformance												
Test Status	Mandatory												
Requirement Description	For all Service Frames declared Green and associated with a particular Class of Service Identifier on a Point-to-Point EVC that arrive at the UNI during a time interval T , Frame Loss Ratio Performance MUST be less than or equal to the Frame Loss Ratio Performance Objective												
Test Object	Verify that for all Service Frames declared Green and associated with a particular Class of Service Identifier on a Point-to-Point EVC that arrive at the UNI during a time interval T , Frame Loss Ratio Performance is less than or equal to the Frame Loss Ratio Performance Objective												
Test Configuration	At least one EVC associating at least two UNIs is configured and at least one Bandwidth Profile with CIR > 0 is associated with at least one of the UNIs. Testers are attached to all UNIs in the configured EVCs												
VLAN-ID/EVC Map	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">INGRESS UNI 'A'</th> <th colspan="2">EGRESS UNI 'B'</th> </tr> <tr> <th>CE-VLAN ID</th> <th>EVC</th> <th>CE-VLAN ID</th> <th>EVC</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> </tr> </tbody> </table> <p>Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1.</p>	INGRESS UNI 'A'		EGRESS UNI 'B'		CE-VLAN ID	EVC	CE-VLAN ID	EVC	10	EVC ₁	10	EVC ₁
INGRESS UNI 'A'		EGRESS UNI 'B'											
CE-VLAN ID	EVC	CE-VLAN ID	EVC										
10	EVC ₁	10	EVC ₁										
Bandwidth Profile	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="4">Per Ingress UNI</th> </tr> <tr> <th>UNI</th> <th colspan="3">Bandwidth Profile Parameters</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">UNI_A</td> <td style="text-align: center;">CIR_A</td> <td style="text-align: center;">CBS_A</td> <td style="text-align: center;">EIR_A EBS_A</td> </tr> </tbody> </table> <p>Note 1 : (0 < CIR_A ≤ UNI Speed), (CBS_A ≥ maximum Service Frame size)</p>	Per Ingress UNI				UNI	Bandwidth Profile Parameters			UNI _A	CIR _A	CBS _A	EIR _A EBS _A
Per Ingress UNI													
UNI	Bandwidth Profile Parameters												
UNI _A	CIR _A	CBS _A	EIR _A EBS _A										
Service Performance	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>CoS Identifier</th> <th>EVC Performance Service Attributes</th> <th>Performance Objectives</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">Frame Loss Ratio (FLR) Performance</td> <td style="text-align: center;">FLR₁</td> </tr> </tbody> </table>	CoS Identifier	EVC Performance Service Attributes	Performance Objectives	1	Frame Loss Ratio (FLR) Performance	FLR ₁						
CoS Identifier	EVC Performance Service Attributes	Performance Objectives											
1	Frame Loss Ratio (FLR) Performance	FLR ₁											
Test Procedure	Tester offers Service Frames at the ingress UNI into the configured EVCs and over a time interval T counts the number of Service Frames declared Green at the ingress UNI and successfully received at the egress UNI. Frame Loss Ratio Performance is then calculated as the ratio, expressed as a percentage, of the number of Service Frames declared Green not delivered at the egress UNI divided by the total number of such Service Frames. Service Frames may be offered at an average rate up to CIR _A												
Units	Number of Service Frames												
Variables	Bandwidth Profile Parameters CIR _A , CBS _A , EIR _A , EBS _A , UNIs interface Speed, number of EVCs per UNI, number and values of CE-VLAN IDs, number and values of CoS ID, time interval T , Performance Objective FLR ₁												
Results	Pass or fail												
Remarks													

9. Abstract Test Cases for Bandwidth Profiles Service Attributes

In this section we again assume familiarity with the MEF 10 [1] and, in particular, its section 7.10 which defines Bandwidth Profiles Service Attributes. Abstract Test Cases based on Bandwidth Profiles Service Attributes described in the MEF 10 [1] are defined. There are seven Test Cases defined in this section.

Test Case 4: Bandwidth Profile Rate Enforcement when $CIR > 0$ and $EIR = 0$

Test Case 5: Bandwidth Profile Rate Enforcement when $CIR = 0$ and $EIR > 0$

Test Case 6: Bandwidth Profile Rate Enforcement when $CIR > 0$ and $EIR > 0$

Test Case 7: Bandwidth Profile per Ingress UNI

Test Case 8: Bandwidth Profile per EVC

Test Case 9: Bandwidth Profile per Class of Service

Test Case 10: Multiple Bandwidth Profiles at the UNI

Test Case 4: Bandwidth Profile Rate Enforcement when CIR > 0 and EIR = 0

ABSTRACT TEST SUITE FOR TRAFFIC MANAGEMENT: PHASE 1																
Test Name	Bandwidth Profile Rate Enforcement when CIR > 0 and EIR = 0															
Test Definition ID	M.7.10.2.1-2															
Reference Document	MEF 10 [Ethernet Services Attributes Phase 1]															
Test Type	Conformance															
Test Status	Mandatory															
Requirement Description	When a Bandwidth Profile is associated with a UNI, with a CIR > 0 and an EIR = 0, the amount of traffic delivered at the egress UNI MUST NOT exceed the amount of traffic accepted as Green (W_G) at the ingress UNI during a time interval T , provided that the ingress traffic is greater than W_G															
Test Object	Verify that when a Bandwidth Profile is associated with a UNI, with a CIR > 0 and an EIR = 0, the amount of traffic delivered at the egress UNI does not exceed the amount of traffic accepted as Green (W_G) at the ingress UNI during a time interval T , provided that the ingress traffic is greater than W_G															
Test Configuration	At least one EVC associating at least two UNIs is configured and at least one Bandwidth Profile is applied at the UNI. Testers are attached to all UNIs in the configured EVCs															
VLAN-ID/EVC Map	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">INGRESS UNI 'A'</th> <th colspan="2">EGRESS UNI 'B'</th> </tr> <tr> <th>CE-VLAN ID</th> <th>EVC</th> <th>CE-VLAN ID</th> <th>EVC</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> </tr> </tbody> </table> <p>Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1</p>	INGRESS UNI 'A'		EGRESS UNI 'B'		CE-VLAN ID	EVC	CE-VLAN ID	EVC	10	EVC ₁	10	EVC ₁			
INGRESS UNI 'A'		EGRESS UNI 'B'														
CE-VLAN ID	EVC	CE-VLAN ID	EVC													
10	EVC ₁	10	EVC ₁													
Bandwidth Profile	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="5">Per Ingress UNI</th> </tr> <tr> <th>UNI</th> <th colspan="4">Bandwidth Profile Parameters</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">UNI_A</td> <td style="text-align: center;">CIR_A</td> <td style="text-align: center;">CBS_A</td> <td style="text-align: center;">EIR_A</td> <td style="text-align: center;">EBS_A</td> </tr> </tbody> </table> <p>Note 1 : ($0 < CIR_A < \text{UNI Speed}$), ($CBS_A \geq \text{maximum Service Frame size}$) Note 2 : ($EIR_A = 0$) and ($EBS_A = 0$)</p>	Per Ingress UNI					UNI	Bandwidth Profile Parameters				UNI _A	CIR _A	CBS _A	EIR _A	EBS _A
Per Ingress UNI																
UNI	Bandwidth Profile Parameters															
UNI _A	CIR _A	CBS _A	EIR _A	EBS _A												
Service Performance	Not Specified															
Test Procedure	<p>Tester offers Service Frames of length λ at an average rate greater than CIR_A to the ingress UNI during a time interval T and measures the number of Service Frames delivered at the egress UNI. The amount of traffic delivered at the egress UNI must not exceed W_G where:</p> <ul style="list-style-type: none"> W_G is the amount of traffic accepted as Green over the time interval T that should be delivered to the egress UNI 															
Units	Number of valid Service Frames															
Variables	Bandwidth Profile Parameters CIR_A , CBS_A , UNIs interface speed, number of UNIs, number of EVCs per UNI, type of EVC (Point-to-Point and Multipoint-to-Multipoint), number and values of CE-VLAN IDs, time interval T , number and length λ of the offered Service Frames															
Results	Pass or fail															
Remarks																

Test Case 5: Bandwidth Profile Rate Enforcement when CIR = 0 and EIR > 0

ABSTRACT TEST SUITE FOR TRAFFIC MANAGEMENT: PHASE 1																
Test Name	Bandwidth Profile Rate Enforcement when CIR = 0 and EIR > 0															
Test Definition ID	M.7.10.2.1-2															
Reference Document	MEF 10 [Ethernet Services Attributes Phase 1]															
Test Type	Conformance															
Test Status	Mandatory															
Requirement Description	When a Bandwidth Profile is associated with a UNI, with a CIR = 0 and an EIR > 0, the amount of traffic delivered at the egress UNI MUST NOT exceed the amount of traffic accepted as Yellow (W_Y) at the ingress UNI during a time interval T , provided that the ingress traffic is greater than W_Y															
Test Object	Verify that when a Bandwidth Profile is associated with a UNI, with a CIR = 0 and an EIR > 0, the amount of traffic delivered at the egress UNI does not exceed the amount of traffic accepted as Yellow (W_Y) at the ingress UNI during a time interval T , provided that the ingress traffic is greater than W_Y															
Test Configuration	At least one EVC associating at least two UNIs is configured and at least one Bandwidth Profile is applied at the UNI. Testers are attached to all UNIs in the configured EVCs															
VLAN-ID/EVC Map	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">INGRESS UNI 'A'</th> <th colspan="2">EGRESS UNI 'B'</th> </tr> <tr> <th>CE-VLAN ID</th> <th>EVC</th> <th>CE-VLAN ID</th> <th>EVC</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> </tr> </tbody> </table> <p>Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1</p>	INGRESS UNI 'A'		EGRESS UNI 'B'		CE-VLAN ID	EVC	CE-VLAN ID	EVC	10	EVC ₁	10	EVC ₁			
INGRESS UNI 'A'		EGRESS UNI 'B'														
CE-VLAN ID	EVC	CE-VLAN ID	EVC													
10	EVC ₁	10	EVC ₁													
Bandwidth Profile	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="5">Per Ingress UNI</th> </tr> <tr> <th>UNI</th> <th colspan="4">Bandwidth Profile Parameters</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">UNI_A</td> <td style="text-align: center;">CIR_A</td> <td style="text-align: center;">CBS_A</td> <td style="text-align: center;">EIR_A</td> <td style="text-align: center;">EBS_A</td> </tr> </tbody> </table> <p>Note 1 : (CIR_A = 0) and (CBS_A = 0) Note 2 : (0 < EIR_A < UNI Speed), (EBS_A ≥ maximum Service Frame size)</p>	Per Ingress UNI					UNI	Bandwidth Profile Parameters				UNI _A	CIR _A	CBS _A	EIR _A	EBS _A
Per Ingress UNI																
UNI	Bandwidth Profile Parameters															
UNI _A	CIR _A	CBS _A	EIR _A	EBS _A												
Service Performance	Not Specified															
Test Procedure	<p>Tester offers Service Frames of length λ at an average rate greater than EIR_A to the ingress UNI during a time interval T and measures the number of Service Frames delivered at the egress UNI. The amount of traffic delivered at the egress UNI must not exceed W_Y where:</p> <ul style="list-style-type: none"> W_Y is the amount of traffic accepted as Yellow over the time interval T that may be delivered to the egress UNI 															
Units	Number of valid Service Frames															
Variables	Bandwidth Profile Parameters EIR _A , EBS _A , UNIs interface speed, number of UNIs, number of EVCs per UNI, type of EVC (Point-to-Point and Multipoint-to-Multipoint), number and values of CE-VLAN IDs, time interval T , number and length λ of the offered Service Frames															
Results	Pass or fail															
Remarks																

Test Case 6: Bandwidth Profile Rate Enforcement when CIR > 0 and EIR > 0

ABSTRACT TEST SUITE FOR TRAFFIC MANAGEMENT: PHASE 1																															
Test Name	Bandwidth Profile Rate Enforcement when CIR > 0 and EIR > 0																														
Test Definition ID	M.7.10.2.1-2																														
Reference Document	MEF 10 [Ethernet Services Attributes Phase 1]																														
Test Type	Conformance																														
Test Status	Mandatory																														
Requirement Description	When a Bandwidth Profile is associated with a UNI, with a CIR > 0 and an EIR > 0, the amount of traffic delivered at the egress UNI MUST NOT exceed the amount of traffic accepted as Green (W_G) plus the amount of traffic accepted as Yellow (W_Y) at the ingress UNI during a time interval T , provided that the ingress traffic is greater than ($W_G + W_Y$)																														
Test Object	Verify that when a Bandwidth Profile is associated with a UNI, with a CIR > 0 and an EIR > 0, the amount of traffic delivered at the egress UNI does not exceed the amount of traffic accepted as Green (W_G) plus the amount of traffic accepted as Yellow (W_Y) at the ingress UNI during a time interval T , provided that the ingress traffic is greater than ($W_G + W_Y$)																														
Test Configuration	At least one EVC associating at least two UNIs is configured and at least one Bandwidth Profile is applied at the UNI. Testers are attached to all UNIs in the configured EVCs																														
VLAN-ID/EVC Map	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">INGRESS UNI 'A'</th> <th colspan="2">EGRESS UNI 'B'</th> </tr> <tr> <th>CE-VLAN ID</th> <th>EVC</th> <th>CE-VLAN ID</th> <th>EVC</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> <td style="text-align: center;">10</td> <td style="text-align: center;">EVC₁</td> </tr> </tbody> </table> <p>Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1</p>	INGRESS UNI 'A'		EGRESS UNI 'B'		CE-VLAN ID	EVC	CE-VLAN ID	EVC	10	EVC ₁	10	EVC ₁																		
INGRESS UNI 'A'		EGRESS UNI 'B'																													
CE-VLAN ID	EVC	CE-VLAN ID	EVC																												
10	EVC ₁	10	EVC ₁																												
Bandwidth Profile	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="5">Per Ingress UNI</th> </tr> <tr> <th>UNI</th> <th colspan="4">Bandwidth Profile Parameters</th> </tr> <tr> <th>UNI_A</th> <th>CIR_A</th> <th>CBS_A</th> <th>EIR_A</th> <th>EBS_A</th> </tr> </thead> <tbody> <tr> <td colspan="5">Note 1 : (0 < CIR_A < UNI Speed), (CBS_A ≥ maximum Service Frame size)</td> </tr> <tr> <td colspan="5">Note 2 : (0 < EIR_A < UNI Speed), (EBS_A ≥ maximum Service Frame size)</td> </tr> <tr> <td colspan="5">Note 3 : (CIR_A + EIR_A < UNI Speed)</td> </tr> </tbody> </table>	Per Ingress UNI					UNI	Bandwidth Profile Parameters				UNI _A	CIR _A	CBS _A	EIR _A	EBS _A	Note 1 : (0 < CIR _A < UNI Speed), (CBS _A ≥ maximum Service Frame size)					Note 2 : (0 < EIR _A < UNI Speed), (EBS _A ≥ maximum Service Frame size)					Note 3 : (CIR _A + EIR _A < UNI Speed)				
Per Ingress UNI																															
UNI	Bandwidth Profile Parameters																														
UNI _A	CIR _A	CBS _A	EIR _A	EBS _A																											
Note 1 : (0 < CIR _A < UNI Speed), (CBS _A ≥ maximum Service Frame size)																															
Note 2 : (0 < EIR _A < UNI Speed), (EBS _A ≥ maximum Service Frame size)																															
Note 3 : (CIR _A + EIR _A < UNI Speed)																															
Service Performance	Not Specified																														
Test Procedure	<p>Tester offers Service Frames of length λ at an average rate greater than $CIR_A + EIR_A$ to the ingress UNI during a time interval T and measures the number of Service Frames delivered at the egress UNI. The amount of traffic delivered at the egress UNI must not exceed ($W_G + W_Y$) where:</p> <ul style="list-style-type: none"> W_G is the amount of traffic accepted as Green over the time interval T that should be delivered to the egress UNI W_Y is the amount of traffic accepted as Yellow over the time interval T that may be delivered to the egress UNI 																														
Units	Number of valid Service Frames																														
Variables	Bandwidth Profile Parameters CIR_A , CBS_A , EIR_A , EBS_A , UNIs interface speed, number of UNIs, number of EVCs per UNI, type of EVC (Point-to-Point and Multipoint-to-Multipoint), number and values of CE-VLAN IDs, time interval T , number and length λ of the offered Service Frames																														
Results	Pass or fail																														
Remarks																															

Test Case 7: Bandwidth Profile per Ingress UNI

ABSTRACT TEST SUITE FOR TRAFFIC MANAGEMENT: PHASE 1																					
Test Name	Bandwidth Profile per Ingress UNI																				
Test Definition ID	M.7.10.3																				
Reference Document	MEF 10 [Ethernet Services Attributes Phase 1]																				
Test Type	Conformance																				
Test Status	Mandatory																				
Requirement Description	When a per Ingress UNI Bandwidth Profile is associated with a UNI, the Bandwidth Profile MUST be applied to all ingress Service Frames at that UNI																				
Test Object	Verify that when a per Ingress UNI Bandwidth Profile is associated with a UNI, the Bandwidth Profile is applied to all ingress Service Frames at that UNI																				
Test Configuration	At least two EVCs associating at least two UNIs are configured such that each associated UNI is in at least two EVCs and at least one CE-VLAN ID is mapped per EVC. A per Ingress UNI Bandwidth Profile is associated with at least one of the UNIs. Testers are attached to all UNIs in the configured EVCs																				
VLAN-ID/EVC Map	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">INGRESS UNI 'A'</th> <th colspan="2">EGRESS UNI 'B'</th> </tr> <tr> <th>CE-VLAN ID</th> <th>EVC</th> <th>CE-VLAN ID</th> <th>EVC</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>EVC₁</td> <td>10</td> <td>EVC₁</td> </tr> <tr> <td>12</td> <td>EVC₂</td> <td>12</td> <td>EVC₂</td> </tr> </tbody> </table> <p>Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1</p>	INGRESS UNI 'A'		EGRESS UNI 'B'		CE-VLAN ID	EVC	CE-VLAN ID	EVC	10	EVC ₁	10	EVC ₁	12	EVC ₂	12	EVC ₂				
INGRESS UNI 'A'		EGRESS UNI 'B'																			
CE-VLAN ID	EVC	CE-VLAN ID	EVC																		
10	EVC ₁	10	EVC ₁																		
12	EVC ₂	12	EVC ₂																		
Bandwidth Profile	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="5">Per Ingress UNI</th> </tr> <tr> <th>UNI</th> <th colspan="4">Bandwidth Profile Parameters</th> </tr> <tr> <th>UNI_A</th> <th>CIR_A</th> <th>CBS_A</th> <th>EIR_A</th> <th>EBS_A</th> </tr> </thead> <tbody> <tr> <td colspan="5">Note 1 : (0 < CIR_A < UNI Speed), (CBS_A ≥ maximum Service Frame size)</td> </tr> </tbody> </table>	Per Ingress UNI					UNI	Bandwidth Profile Parameters				UNI _A	CIR _A	CBS _A	EIR _A	EBS _A	Note 1 : (0 < CIR _A < UNI Speed), (CBS _A ≥ maximum Service Frame size)				
Per Ingress UNI																					
UNI	Bandwidth Profile Parameters																				
UNI _A	CIR _A	CBS _A	EIR _A	EBS _A																	
Note 1 : (0 < CIR _A < UNI Speed), (CBS _A ≥ maximum Service Frame size)																					
Service Performance	Not Specified																				
Test Procedure	<p>Tester offers Service Frames of length λ into the configured EVCs at the ingress UNI and verifies that over a time interval T at least one Service Frame from each of the EVCs is delivered at the associated egress UNIs. Service Frames are offered at equal average rates into each of the configured EVCs at the ingress UNI, at an aggregate average rate greater than the CIR_A. Tester also verifies that the amount of traffic delivered at the egress UNI does not exceed ($W_G + W_Y$) where:</p> <ul style="list-style-type: none"> W_G is the amount of traffic accepted as Green over the time interval T that should be delivered to the egress UNI W_Y is the amount of traffic accepted as Yellow over the time interval T that may be delivered to the egress UNI 																				
Units	Number of valid Service Frames																				
Variables	Bandwidth Profile Parameters CIR _A , CBS _A , EIR _A , EBS _A , UNIs interface speed, number of UNIs, number of EVCs per UNI, type of EVC (Point-to-Point and Multipoint-to-Multipoint), number and values of CE-VLAN IDs, time interval T , number and length λ of the offered Service Frames																				
Results	Pass or fail																				
Remarks																					

Test Case 8: Bandwidth Profile per EVC

ABSTRACT TEST SUITE FOR TRAFFIC MANAGEMENT: PHASE 1																	
Test Name	Bandwidth Profile per EVC																
Test Definition ID	M.7.10.4																
Reference Document	MEF 10 [Ethernet Services Attributes Phase 1]																
Test Type	Conformance																
Test Status	Mandatory																
Requirement Description	When a UNI is associated with a per EVC Bandwidth Profile, the Bandwidth Profile MUST be applied to all ingress Service Frames at the UNI on that EVC																
Test Object	Verify that when a UNI is associated with a per EVC Bandwidth Profile, the Bandwidth Profile is applied to all ingress Service Frames at the UNI on that EVC																
Test Configuration	At least two EVCs associating at least two UNIs are configured such that each associated UNI is in at least two of the same EVCs and at least one CE-VLAN ID is mapped per EVC. A per EVC Bandwidth Profile is associated with at least one of the UNIs. Testers are attached to all UNIs in the configured EVCs																
VLAN-ID/EVC Map	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">INGRESS UNI 'A'</th> <th colspan="2">EGRESS UNI 'B'</th> </tr> <tr> <th>CE-VLAN ID</th> <th>EVC</th> <th>CE-VLAN ID</th> <th>EVC</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>EVC₁</td> <td>10</td> <td>EVC₁</td> </tr> <tr> <td>12</td> <td>EVC₂</td> <td>12</td> <td>EVC₂</td> </tr> </tbody> </table> <p>Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1</p>	INGRESS UNI 'A'		EGRESS UNI 'B'		CE-VLAN ID	EVC	CE-VLAN ID	EVC	10	EVC ₁	10	EVC ₁	12	EVC ₂	12	EVC ₂
INGRESS UNI 'A'		EGRESS UNI 'B'															
CE-VLAN ID	EVC	CE-VLAN ID	EVC														
10	EVC ₁	10	EVC ₁														
12	EVC ₂	12	EVC ₂														
Bandwidth Profile	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="4">Per EVC</th> </tr> <tr> <th>EVC</th> <th colspan="3">Bandwidth Profile Parameters</th> </tr> </thead> <tbody> <tr> <td>EVC₁</td> <td>CIR₁</td> <td>CBS₁</td> <td>EIR₁ EBS₁</td> </tr> <tr> <td>EVC₂</td> <td>CIR₂</td> <td>CBS₂</td> <td>EIR₂ EBS₂</td> </tr> </tbody> </table> <p>Note 1 : (CIR₁ = 0), (CBS₁ = 0) and (EIR₁ = 0) and (EBS₁ = 0) Note 2 : (0 < CIR₂ < UNI Speed), (CBS₂ ≥ maximum Service Frame size) Note 3 : (ΣCIR < UNI Speed)</p>	Per EVC				EVC	Bandwidth Profile Parameters			EVC ₁	CIR ₁	CBS ₁	EIR ₁ EBS ₁	EVC ₂	CIR ₂	CBS ₂	EIR ₂ EBS ₂
Per EVC																	
EVC	Bandwidth Profile Parameters																
EVC ₁	CIR ₁	CBS ₁	EIR ₁ EBS ₁														
EVC ₂	CIR ₂	CBS ₂	EIR ₂ EBS ₂														
Service Performance	Not Specified																
Test Procedure	<p>Tester offers Service Frames of length λ into the configured EVCs at the ingress UNI during a time interval T, at an aggregate average rate in excess of the sum of the CIRs of all the configured EVCs and measures the number of Service Frames delivered at the egress UNI. For EVC₁, the amount of traffic delivered at the egress UNI must be 0 and for every other configured EVC, the amount of traffic delivered at the egress UNI must not exceed ($W_G + W_Y$) where:</p> <ul style="list-style-type: none"> W_G is the amount of traffic accepted as Green over the time interval T that should be delivered to the egress UNI W_Y is the amount of traffic accepted as Yellow over the time interval T that may be delivered to the egress UNI 																
Units	Number of valid Service Frames																
Variables	Bandwidth Profile Parameters CIR ₂ , CBS ₂ , EIR ₂ , EBS ₂ , UNIs interface speed, number of UNIs, number of EVCs per UNI, type of EVC (Point-to-Point and Multipoint-to-Multipoint), number and values of CE-VLAN IDs, time interval T , number and length λ of the offered Service Frames																
Results	Pass or fail																
Remarks																	

Test Case 9: Bandwidth Profile per Class of Service

ABSTRACT TEST SUITE FOR TRAFFIC MANAGEMENT: PHASE 1																
Test Name	Bandwidth Profile per Class of Service															
Test Definition ID	M.7.10.5															
Reference Document	MEF 10 [Ethernet Services Attributes Phase 1]															
Test Type	Conformance															
Test Status	Mandatory															
Requirement Description	When a UNI is associated with a per Class of Service Bandwidth Profile, the Bandwidth Profile MUST be applied to all ingress Service Frames at the UNI with that specific Class of Service Identifier															
Test Object	Verify that when a UNI is associated with a per Class of Service Bandwidth Profile, the Bandwidth Profile is applied to all ingress Service Frames at the UNI with that specific Class of Service Identifier															
Test Configuration	At least one EVC associating at least two UNIs is configured and at least one CE-VLAN ID is mapped per EVC. A per Class of Service Bandwidth Profile is associated with at least one of the UNIs. At least two CoS Identifiers are used to identify the Class of Service applicable to the Service Frames offered at the UNI. Testers are attached to all UNIs in the configured EVCs															
VLAN-ID/EVC Map	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">INGRESS UNI 'A'</th> <th colspan="2">EGRESS UNI 'B'</th> </tr> <tr> <th>CE-VLAN ID</th> <th>EVC</th> <th>CE-VLAN ID</th> <th>EVC</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>EVC₁</td> <td>10</td> <td>EVC₁</td> </tr> </tbody> </table> <p>Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1</p>	INGRESS UNI 'A'		EGRESS UNI 'B'		CE-VLAN ID	EVC	CE-VLAN ID	EVC	10	EVC ₁	10	EVC ₁			
INGRESS UNI 'A'		EGRESS UNI 'B'														
CE-VLAN ID	EVC	CE-VLAN ID	EVC													
10	EVC ₁	10	EVC ₁													
Bandwidth Profile	<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="4">Per Class of Service</th> </tr> <tr> <th>EVC</th> <th>CoS Identifier</th> <th>CE-VLAN CoS</th> <th>Bandwidth Profile Parameters</th> </tr> </thead> <tbody> <tr> <td rowspan="2">EVC₁</td> <td>1</td> <td>1</td> <td>CIR₁₁ CBS₁₁ EIR₁₁ EBS₁₁</td> </tr> <tr> <td>2</td> <td>7</td> <td>CIR₁₂ CBS₁₂ EIR₁₂ EBS₁₂</td> </tr> </tbody> </table> <p>Note 1 : (CIR₁₁ = 0), (CBS₁₁ = 0) and (EIR₁₁ = 0) and (EBS₁₁ = 0) Note 2 : (0 < CIR₁₂ < UNI Speed), (CBS₁₂ ≥ maximum Service Frame size) Note 3 : (ΣCIR < UNI Speed)</p>	Per Class of Service				EVC	CoS Identifier	CE-VLAN CoS	Bandwidth Profile Parameters	EVC ₁	1	1	CIR ₁₁ CBS ₁₁ EIR ₁₁ EBS ₁₁	2	7	CIR ₁₂ CBS ₁₂ EIR ₁₂ EBS ₁₂
Per Class of Service																
EVC	CoS Identifier	CE-VLAN CoS	Bandwidth Profile Parameters													
EVC ₁	1	1	CIR ₁₁ CBS ₁₁ EIR ₁₁ EBS ₁₁													
	2	7	CIR ₁₂ CBS ₁₂ EIR ₁₂ EBS ₁₂													
Service Performance	Not Specified															
Test Procedure	<p>Tester offers Service Frames of length λ into the configured EVCs at the ingress UNI during a time interval T, at an aggregate average rate in excess of the sum of the CIRs of all the configured CoS IDs and measures the number of Service Frames delivered at the egress UNI. For CoS ID 1, the amount of traffic delivered at the egress UNI must be 0 and for every other configured CoS ID, the amount of traffic delivered at the egress UNI must not exceed ($W_G + W_Y$) where:</p> <ul style="list-style-type: none"> W_G is the amount of traffic accepted as Green over the time interval T that should be delivered to the egress UNI W_Y is the amount of traffic accepted as Yellow over the time interval T that may be delivered to the egress UNI 															
Units	Number of valid Service Frames															
Variables	Bandwidth Profile Parameters CIR ₁₂ , CBS ₁₂ , EIR ₁₂ , EBS ₁₂ , UNIs interface Speed, number of UNIs, number of EVCs per UNI, number of CoS Identifiers per EVC, type of EVC (Point-to-Point and Multipoint-to-Multipoint), number and values of CE-VLAN IDs, number and values of CE-VLAN CoS, time interval T , number and length λ of the offered Service Frames															
Results	Pass or fail															
Remarks																

Test Case 10: Multiple Bandwidth Profiles at the UNI

ABSTRACT TEST SUITE FOR TRAFFIC MANAGEMENT: PHASE 1																																												
Test Name	Multiple Bandwidth Profiles at the UNI																																											
Test Definition ID	M.7.10.6																																											
Reference Document	MEF 10 [Ethernet Services Attributes Phase 1]																																											
Test Type	Conformance																																											
Test Status	Optional																																											
Requirement Description	Multiple models of Bandwidth Profile application MAY exist simultaneously at the UNI																																											
Test Object	Verify that multiple models of Bandwidth Profile application can exist simultaneously at the UNI																																											
Test Configuration	At least two EVCs associating at least two UNIs are configured such that each associated UNI is in at least two of the same EVCs and at least one CE-VLAN ID is mapped per EVC. A per EVC Bandwidth Profile and a per Class of Service Bandwidth Profile are associated with at least one of the UNIs. Testers are attached to all UNIs in the configured EVCs																																											
VLAN-ID/EVC Map	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">INGRESS UNI 'A'</th> <th colspan="2">EGRESS UNI 'B'</th> </tr> <tr> <th>CE-VLAN ID</th> <th>EVC</th> <th>CE-VLAN ID</th> <th>EVC</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>EVC₁</td> <td>10</td> <td>EVC₁</td> </tr> <tr> <td>12</td> <td>EVC₂</td> <td>12</td> <td>EVC₂</td> </tr> </tbody> </table> <p>Use of other CE-VLAN IDs is permitted provided that configuration of the CE-VLAN IDs conforms to MEF 10 [Ethernet Services Attributes Phase 1], Section 7.5.1</p>	INGRESS UNI 'A'		EGRESS UNI 'B'		CE-VLAN ID	EVC	CE-VLAN ID	EVC	10	EVC ₁	10	EVC ₁	12	EVC ₂	12	EVC ₂																											
INGRESS UNI 'A'		EGRESS UNI 'B'																																										
CE-VLAN ID	EVC	CE-VLAN ID	EVC																																									
10	EVC ₁	10	EVC ₁																																									
12	EVC ₂	12	EVC ₂																																									
Bandwidth Profile	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4">Per EVC</th> </tr> <tr> <th>EVC</th> <th colspan="3">Bandwidth Profile Parameters</th> </tr> </thead> <tbody> <tr> <td>EVC₁</td> <td>CIR₁</td> <td>CBS₁</td> <td>EIR₁ EBS₁</td> </tr> <tr> <td colspan="4">Note 1 : (0 < CIR₁ < UNI Speed), (CBS₁ ≥ maximum Service Frame size)</td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4">Per Class of Service</th> </tr> <tr> <th>EVC</th> <th>CoS Identifier</th> <th>CE-VLAN CoS</th> <th>Bandwidth Profile Parameters</th> </tr> </thead> <tbody> <tr> <td rowspan="2">EVC₂</td> <td>1</td> <td>1</td> <td>CIR₂₁ CBS₂₁ EIR₂₁ EBS₂₁</td> </tr> <tr> <td>2</td> <td>7</td> <td>CIR₂₂ CBS₂₂ EIR₂₂ EBS₂₂</td> </tr> <tr> <td colspan="4">Note 2 : (CIR₂₁ = 0), (CBS₂₁ = 0) and (EIR₂₁ = 0), (EBS₂₁ = 0)</td> </tr> <tr> <td colspan="4">Note 3 : (0 < CIR₂₂ < UNI Speed), (CBS₂₂ ≥ maximum Service Frame size)</td> </tr> <tr> <td colspan="4">Note 4 : (ΣCIR < UNI Speed)</td> </tr> </tbody> </table>	Per EVC				EVC	Bandwidth Profile Parameters			EVC ₁	CIR ₁	CBS ₁	EIR ₁ EBS ₁	Note 1 : (0 < CIR ₁ < UNI Speed), (CBS ₁ ≥ maximum Service Frame size)				Per Class of Service				EVC	CoS Identifier	CE-VLAN CoS	Bandwidth Profile Parameters	EVC ₂	1	1	CIR ₂₁ CBS ₂₁ EIR ₂₁ EBS ₂₁	2	7	CIR ₂₂ CBS ₂₂ EIR ₂₂ EBS ₂₂	Note 2 : (CIR ₂₁ = 0), (CBS ₂₁ = 0) and (EIR ₂₁ = 0), (EBS ₂₁ = 0)				Note 3 : (0 < CIR ₂₂ < UNI Speed), (CBS ₂₂ ≥ maximum Service Frame size)				Note 4 : (ΣCIR < UNI Speed)			
Per EVC																																												
EVC	Bandwidth Profile Parameters																																											
EVC ₁	CIR ₁	CBS ₁	EIR ₁ EBS ₁																																									
Note 1 : (0 < CIR ₁ < UNI Speed), (CBS ₁ ≥ maximum Service Frame size)																																												
Per Class of Service																																												
EVC	CoS Identifier	CE-VLAN CoS	Bandwidth Profile Parameters																																									
EVC ₂	1	1	CIR ₂₁ CBS ₂₁ EIR ₂₁ EBS ₂₁																																									
	2	7	CIR ₂₂ CBS ₂₂ EIR ₂₂ EBS ₂₂																																									
Note 2 : (CIR ₂₁ = 0), (CBS ₂₁ = 0) and (EIR ₂₁ = 0), (EBS ₂₁ = 0)																																												
Note 3 : (0 < CIR ₂₂ < UNI Speed), (CBS ₂₂ ≥ maximum Service Frame size)																																												
Note 4 : (ΣCIR < UNI Speed)																																												
Service Performance	Not Specified																																											
Test Procedure	<p>Tester offers Service Frames of length λ into the configured EVCs at the ingress UNI during a time interval T, at an aggregate average rate in excess of the sum of the CIRs of all the configured EVCs and CoS IDs and measures the number of Service Frames delivered at the egress UNI. For CoS ID 1, the amount of traffic delivered at the egress UNI must be 0 and for every other configured EVC and CoS ID, the amount of traffic delivered at the egress UNI must not exceed ($W_G + W_Y$) where:</p> <ul style="list-style-type: none"> W_G is the amount of traffic accepted as Green over the time interval T that should be delivered to the egress UNI W_Y is the amount of traffic accepted as Yellow over the time interval T that may be delivered to the egress UNI 																																											
Units	Number of valid Service Frames																																											
Variables	Bandwidth Profile Parameters CIR ₁ , CBS ₁ , EIR ₁ , EBS ₁ , CIR ₂₂ , CBS ₂₂ , EIR ₂₂ , EBS ₂₂ , UNIs interface Speed, number of UNIs, number of EVCs per UNI, number of CoS Identifiers per EVC, type of EVC (Point-to-Point and Multipoint-to-Multipoint), number and values of CE-VLAN IDs, number and values of CE-VLAN CoS, time interval T , number and length λ of the offered Service Frames																																											
Results	Pass or fail																																											
Remarks																																												

10. References

Reference	Reference Details
[1] Ethernet Services Attributes Phase 1	MEF 10 [Ethernet Services Attributes Phase 1]
[2] Services Definitions	MEF 6 [Ethernet Services Definitions]
[3] Abstract Test Suite for Ethernet Services at the UNI	MEF 9 [Abstract Test Suite for Ethernet Services at the UNI]
[4] IEEE 802.3 – 2002	Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications, 8 March 2002. (Normative)
[5] RFC 2119	RFC 2119, “Key words for use in RFCs to Indicate Requirement Levels”, S. Bradner, http://www.ietf.org/rfc/rfc2119.txt (Normative)
[6] RFC 2285	RFC 2285, “Benchmarking Terminology for LAN Switching Devices”, R. Mandeville, http://www.ietf.org/rfc/rfc2285.txt
[7] RFC 2544	RFC 2544, “Benchmarking Methodology for Network Interconnect Devices”, S. Bradner, J. McQuaid, http://www.ietf.org/rfc/rfc2544.txt
[8] RFC 2889	RFC 2889, “Benchmarking Methodology for LAN Switching Devices”, R. Mandeville, J. Perser, http://www.ietf.org/rfc/rfc2889.txt